

# HydroWhirl® Mini



(HWM) PVDF Reactionary Force



## DESIGN FEATURES

- Fluid-driven, self-flushing
- Compact design, maintenance-free
- Made from FDA-compliant, PVDF material
- Corrosion-resistant
- Hydrostatic wear free slide bearing

## SPRAY CHARACTERISTICS


- Vigorous spray action

**Spray Angles:** Complete 360° spray coverage.

**Flow Rates:** 3.4 to 9.0 GPM

**Max Temperature:** 194°F/90°C

**Filtration:** Line strainer with a mesh size of 0.012 in/50 mesh

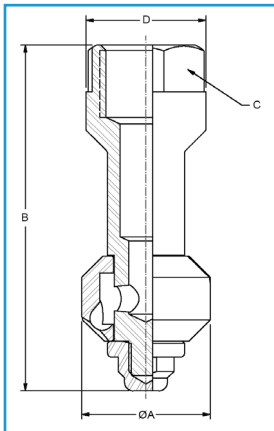

## DIMENSIONS IN INCHES

Pipe Size	A	B	C	D	Weight (oz)
1/2"	1.19	3.19	0.94	1.10	1.1

## HYDROWHIRL® MINI FLOW RATES

Materials: PVDF

Female Connection Type	Nozzle Number	Spray Angles	Flow Rate (GPM) @ Differential Pressure (psi)						Maximum Free Passage	Coverage Dia @ 40 psi
			10	20	30	40	50	60		
			psi	psi	psi	psi	psi	psi		
1/2" FNPT	HWM-7.2	360°	3.41	4.95	6.16	7.20	8.12	8.96	0.08	3

TANK CLEANING